


DIRECTLY FROM THE PRODUCER





CRITICAL FALL HEIGHT TABLE

for choosing rubber tiles according to EN1177 EU standard specifications

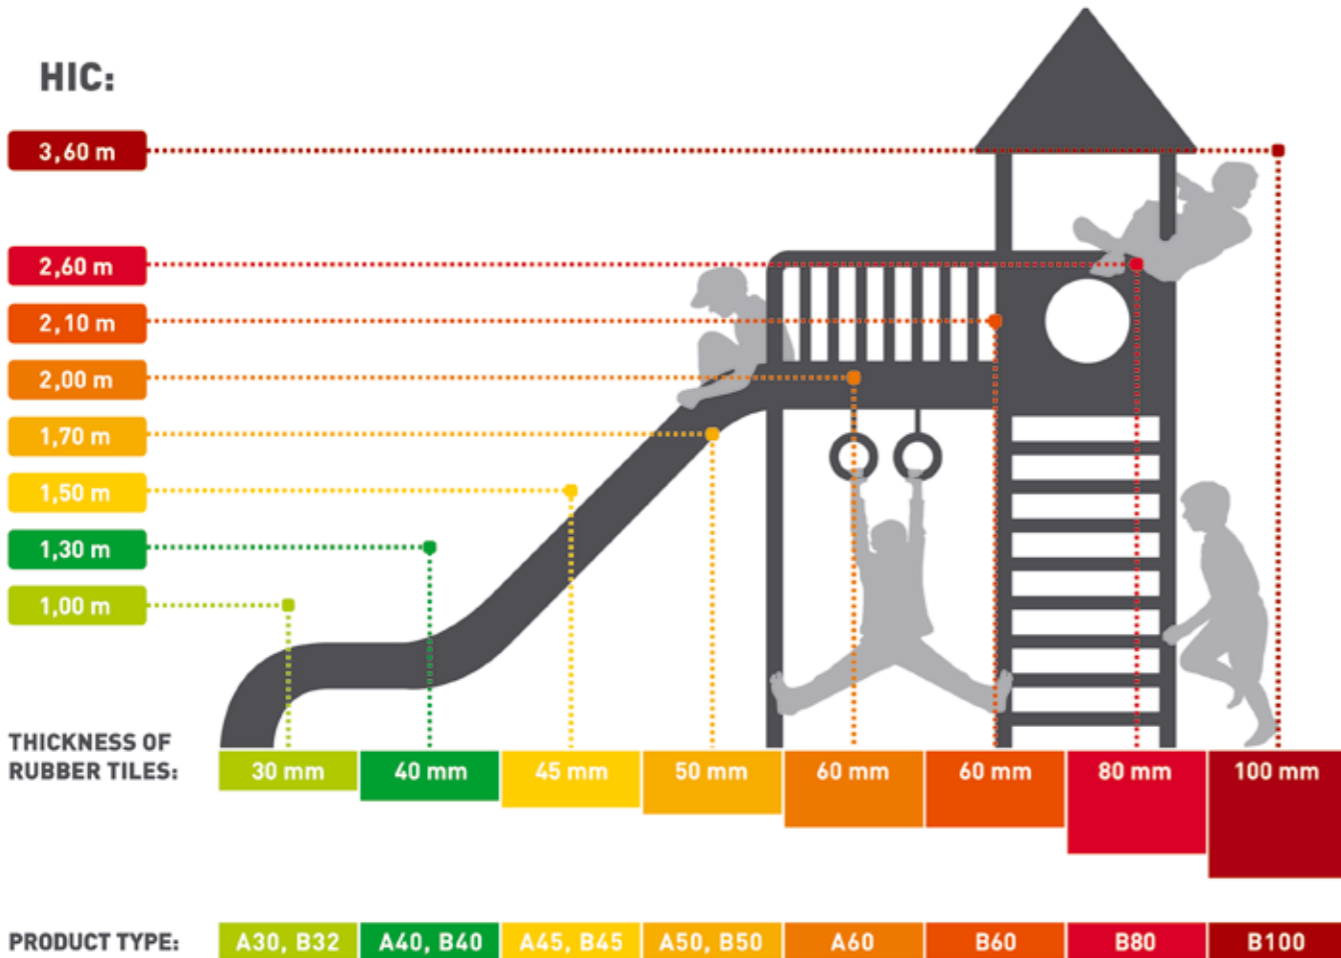

CSOGUMI.EU
sales@csogumi.eu



RUBBER TILES

directly from the producer

Our company, C.S.O. Ltd. is a manufacturer of rubber tiles and floorings in Hungary (EU), have more than 20 years experience in the industry.

We produce rubber tiles for playgrounds, sport fields, gardens, gyms, horse stables, and for other industrial usages in our own production site in Ócsa / Budapest.

We produce all from recycled rubber material, in high standard production quality, based on EU standards (EN1177:2008) and with TÜV certifications.

See our Critical Fall Height table with our product range to comply with the EU legislation.

SAFETY RUBBER TILES FOR PLAYGROUND, RECREATION, MULTIPURPOSE SPORTS APPLICATIONS





FOR PLAYGROUNDS

Our soft, flexible rubber pads are made from 100% recycled rubber granulate, with UV stable dyeing in our own factory. Rubber pads are recommended for playgrounds as shock absorbing floor coverings (to be chosen based on the critical height table).


These rubber pads are also ideal around swimming pools, and non-slip, accident protection surfaces. These protective rubber surfaces greatly contribute to minimizing the risk of an accident. In order to achieve even greater color durability of our rubber tiles, we produce EPDM rubber tiles part is from black SBR rubber granulate, the upper layer is made of color EPDM granulates.

Our products are manufactured in high standard production quality, according to the EU legislation standards (EN1177:2008) and with TÜV certifications.


Available mix with EPDM (UV stable) color granulates



mixed beige




mixed yellow



mixed red



mixed green



mixed blue

Advantages of our rubber tiles:

- shock absorption capability
- flexible, smooth surface
- excellent water permeability
- non-slip surface
- rapid drying
- different colors
- homogeneous and split pattern
- also with UV stable EPDM granulates
- easy to cut
- easy to install
- no maintenance requirement
- environmentally friendly product from recycled material



Available colors



Technical data

Product types	thickness	length/width	kg/m ²	pcs/m ²	m ² /palette	HIC critical fall height
B100 rubber tile	100 mm	500x500 mm	68 kg	4	15	3,60 m
B60 rubber tile	80 mm	500x500 mm	54 kg	4	15	2,80 m
B60 rubber tile	60 mm	500x500 mm	38 kg	4	20	2,10 m
B50 rubber tile	50 mm	500x500 mm	30 kg	4	25	1,70 m
B45 rubber tile	45 mm	500x500 mm	27 kg	4	30	1,50 m
B40 rubber tile	40 mm	500x500 mm	28 kg	4	35	1,30 m
B32 rubber tile	32 mm	500x500 mm	24 kg	4	40	1,00 m



FOR SPORT FIELDS


Our mostly suggested rubber tile for sports tracks/fields is the 30 mm thick, 1000x1000 mm tile made from 100% recycled rubber granulate SBR, with dyeing. Because its 1000x1000 mm parameters it is easy to install on all surfaces.

Our sports fields from rubber tiles provide a high level of safety for athletes on the field. The rubber cover greatly contributes to keep the joints of the athletes safe and, in case of an accident, protect the athlete from injuries.

Our 30x1000x1000 mm rubber cover is available with a split pattern (*visually 500x500 mm squares*), making it the perfect solution for playground floorings as well.

Advantages of our rubber tiles:

- shock absorption capability
- flexible, smooth surface
- excellent water permeability
- non-slip surface
- rapid drying
- different colors
- homogeneous and split pattern
- no maintenance requirement
- environmentally friendly product from recycled material

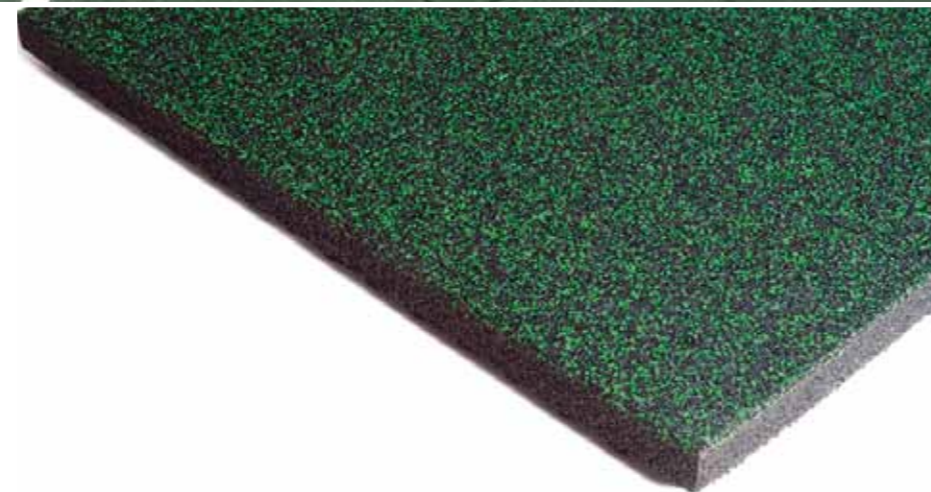


Available colors



Available mix with EPDM (UV stable) color granulates




mixed beige




mixed yellow



mixed red



mixed green



mixed blue

Technical data

Product types	thickness	length/width	kg/m ²	pcs/m ²	m ² /palette	HIC critical fall height
SPORT+ rubber tile	40 mm	1000x1000 mm	28 kg	1	30	1,30 m
SPORT rubber tile	30 mm	1000x1000 mm	20 kg	1	40	1,00 m




FOR FITNESS

Our rubber cover provides a non-slip and flexible flooring for Gyms, Fitness and CrossFit Clubs. Protects the sports equipment and the floor cover from the impact and noise of falling weights of the bumpers. The 15x1000x1000 mm and the 30x1000x1000 mm Fitness rubber pad is a perfect heat and sound proof warm covering. The rubber cover is easy to cut, can be customized with a manual saw, can be glued as needed.



Maintenance is simple, can be cleaned with a broom or with vacuum cleaner. It is recommended to consider the water permeability of the product when cleaning – it is not recommended to wash with lots of water! We offer rubber starter profiles, which can be used as a border piece, provides a solution for accident-free bridging of level differences.

Advantages of our rubber tiles:

- shock absorption capability
- flexible, smooth surface
- non-slip surface
- homogeneous and mixed color surface patterns
- easy to cut
- easy to install
- no maintenance requirement
- environmentally friendly product from recycled material

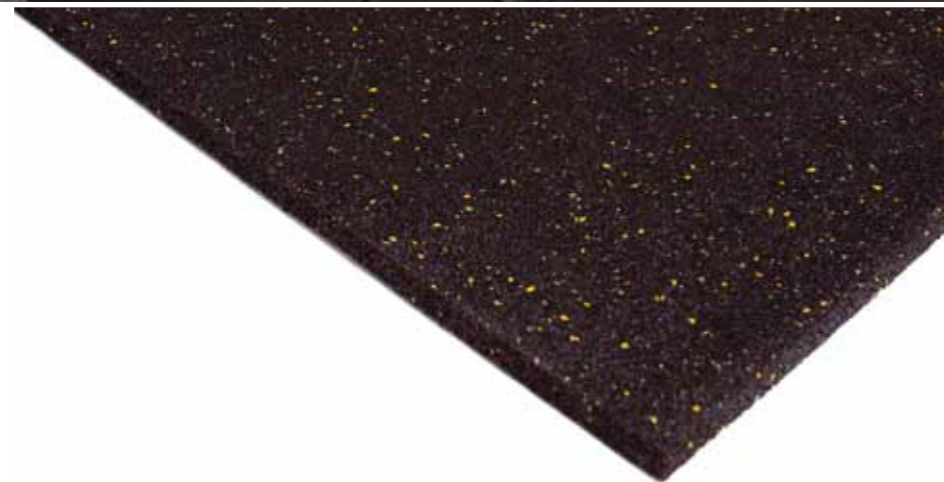

Available in black and mixed with EPDM (UV stable) color granulates from the following EPDM colors.



Technical data

Product types	thickness	length/width	kg/m ²	pcs/m ²	m ² /palette
Fitness rubber tile	15 mm	1000x1000 mm	14 kg	1	70
Fitness Home rubber tile	20 mm	500x500 mm	17 kg	1	50
Crossfit rubber tile	30 mm	1000x1000 mm	24 kg	1	40



Available colors



Advantages of our AGRO and POLO rubber tiles:

- heat insulation
- shock absorption capability
- flexible, smooth, non-slip surface
- water permeability of the POLO tiles
- the POLO tile is water permeable
- the AGRO tile is not letting water/moist through
- rapid drying, slip resistant
- easy to cut
- easy to install
- no maintenance required
- environmentally friendly product from recycled material
- essential to modern-hygienic animal husbandry



FOR KEEPING ANIMALS

POLO rubber tiles

The advantage of POLO stable rubber tiles is that there is an air cushion forming at the bottom part of the profile. Thanks to this, it is less demand for litter, you can reduced the need by up to 70% saving you from sourcing and storage. Bottom of the plates are to be washed with water. Due to this thermal insulation ability of the rubber tiles, it is excellent to use for stables, washrooms.

Technical data

Product types	thickness	length/width	kg/m ²	pcs/m ²	m ² /palette	shore A hardness	maximum load
POLO rubber tile	50 mm	1000×1000 mm	37 kg	1	25	65-70	800 kg

AGRO rubber tiles

Our AGRO 20mm thick 100x100cm rubber tile is more dense, structurally much stronger, than our POLO mat, its hardness is similar then of the vulcanized stall rubber pads. It is not letting the water through. Thanks to its flat bottom it is stable for heavy animals as well. We recommend it for running machines, open areas for horses, livestock farms (*cattle, pigs, etc.*).

Technical data

Product types	thickness	length/width	kg/m ²	pcs/m ²	m ² /palette	shore A hardness	maximum load
AGRO rubber tile	20 mm	1000×1000 mm	18 kg	1	50	65-70	800 kg



C.S.O. Kft.
2364 Ócsa
Némedi úti major
Hungary, Europe

Tel: +36 29-378-283
Mobil: +36 70-626-8161
sales@csogumi.eu

CSOGUMI.EU
sales@csogumi.eu